



CLAYMORE
METAL PRODUCTS

BUILT BETTER
TO ENSURE YOU
BUILD BETTER

ROLL-FORMED STUDS, TRACKS
AND ACCESSORIES



BUILDING FRAMING SOLUTIONS

CLAYMORE METAL PRODUCTS IS A LEADING MANUFACTURER OF METAL FRAMING PRODUCTS AND ACCESSORIES, with a product line specially developed and optimized for the residential, industrial, and commercial building industries.

CLAYMORE METAL PRODUCTS are manufactured using roll-forming technologies based on the knowledge and expertise of over **30 YEARS IN METAL ENGINEERING**. The result is a superior-quality product that enables construction firms to work faster, build better and enhance their reputation.





WHY ROLL-FORMING IS SIMPLY A CUT ABOVE

THE ROLL-FORMING PROCESS CONVERTS SHEET METAL INTO A SPECIALLY ENGINEERED SHAPE UTILIZING CONSECUTIVE SETS OF INTEGRATED ROLLERS.


Each set of integrated rollers gradually shapes the sheet metal into form, allowing us to produce custom metal framing products with a higher degree of detail for greater speed and accuracy on the jobsite.

ADVANTAGES OF ROLL-FORMING MANUFACTURING

- 1** – Metal can be produced and cut in larger quantities which reduces costs
- 2** – Greater dimensional control over other metal-forming processes
- 3** – Products are consistent and endlessly repeatable across a complete run, leading to products with extremely precise dimensions



CLASSIC PLUS STUD

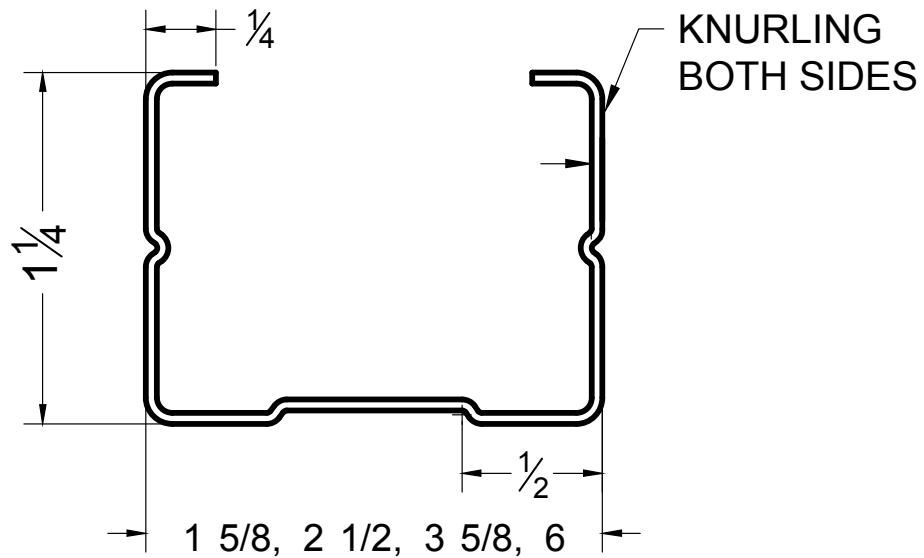


| Part Number | Description | Width | Flange Size | Thickness | Gauge | Length |
|--------------|--|--------|-------------|-----------|-------|------------------------|
| ST162S125-18 | 1-5/8" STUD 1-1/4" FLANGE (18MIL) 25GA | 1-5/8" | 1-1/4" | 0.018" | 25 | 8', 10', 12', + custom |
| ST250S125-18 | 2-1/2" STUD 1-1/4" FLANGE (18MIL) 25GA | 2-1/2" | 1-1/4" | 0.018" | 25 | 8', 10', 12', + custom |
| ST362S125-18 | 3-5/8" STUD 1-1/4" FLANGE (18MIL) 25GA | 3-5/8" | 1-1/4" | 0.018" | 25 | 8', 10', 12', + custom |
| ST600S125-18 | 6" STUD 1-1/4" FLANGE (18MIL) 25GA | 6" | 1-1/4" | 0.018" | 25 | 8', 10', 12', + custom |

MATERIAL: 25 GA. TO 14 GA.
MIN THICKNESS 0.0179" TO MAX 0.075"
Zinc-coated roll steel, CRS, Galvanized steel
YIELD STRENGTH 33 KSI TO 60 KSI

ALL TOLERANCES WILL MEET OR EXCEED THE
STANDARD TOLERANCES FOR STUD & TRACK PRODUCTS
AS PER CSSBI 61:21 STANDARDS FOR COLD FORMED
STEEL FRAMING MEMBERS.

PREMIUM TRACK

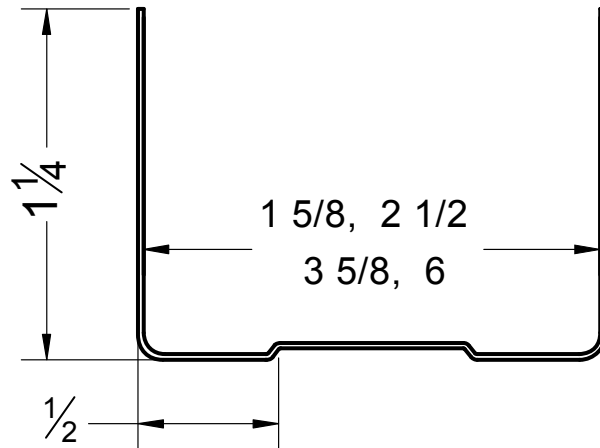


| Part Number | Description | Width | Flange Size | Thickness | Gauge | Length |
|---------------|---|--------|-------------|-----------|-------|--------|
| TRK162T125-18 | 1-5/8" TRACK 1-1/4" FLANGE (18MIL) 25GA | 1-5/8" | 1-1/4" | 0.018" | 25 | 10' |
| TRK250T125-18 | 2-1/2" TRACK 1-1/4" FLANGE (18MIL) 25GA | 2-1/2" | 1-1/4" | 0.018" | 25 | 10' |
| TRK362T125-18 | 3-5/8" TRACK 1-1/4" FLANGE (18MIL) 25GA | 3-5/8" | 1-1/4" | 0.018" | 25 | 10' |
| TRK600T125-18 | 6" TRACK 1-1/4" FLANGE (18MIL) 25GA | 6" | 1-1/4" | 0.018" | 25 | 10' |

MATERIAL: 25 GA. TO 14 GA.
MIN THICKNESS 0.0179" TO MAX 0.075"
Zinc-coated roll steel, CRS, Galvanized steel
YIELD STRENGTH 33 KSI TO 60 KSI


ALL TOLERANCES WILL MEET OR EXCEED THE
STANDARD TOLERANCES FOR STUD & TRACK PRODUCTS
AS PER CSSBI 61:21 STANDARDS FOR COLD FORMED
STEEL FRAMING MEMBERS.

PREMIUM FURRING CHANNEL

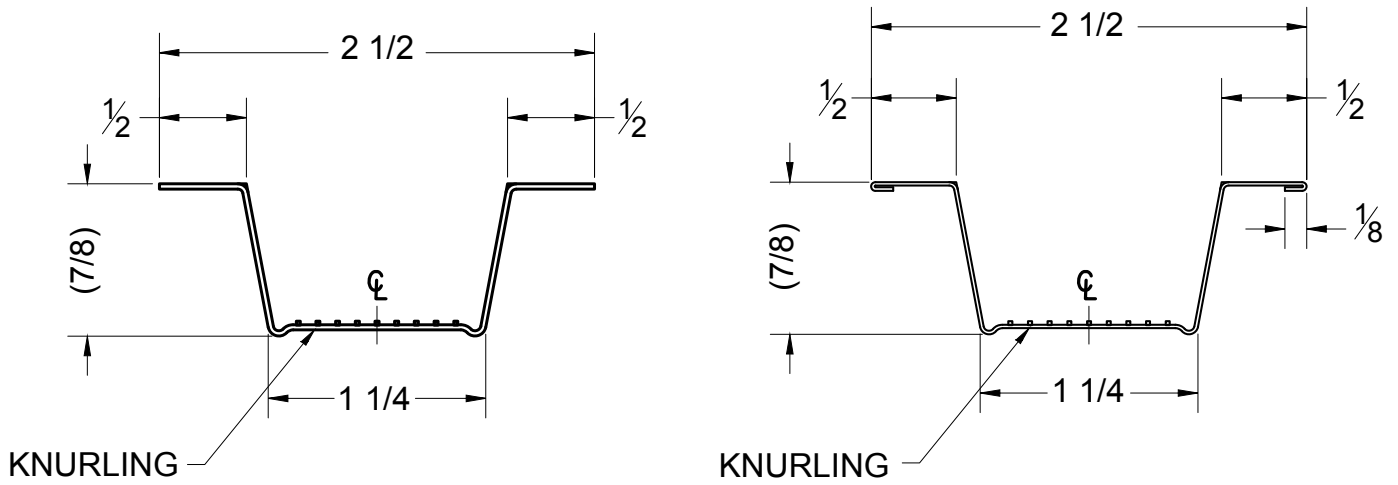


| Part Number | Description | Thickness | Gauge | Length |
|-------------|----------------------------------|-----------|-------|----------|
| FC087-18 | 7/8 FURRING CHANNEL (18MIL) 25GA | 0.018" | 25 | 10', 12' |

PREMIUM CARRYING CHANNEL

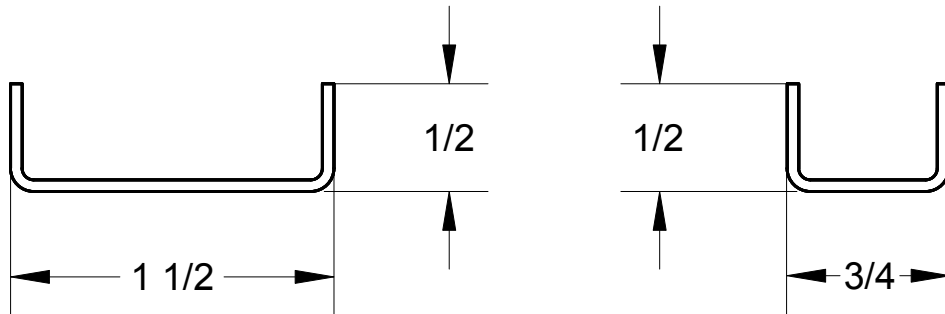


| Part Number | Description | Thickness | Gauge | Length |
|-------------|--|-----------|-------|--------|
| CC150-43 | 1-1/2 X 1/2 COLD ROLLED CHANNEL (43MIL) 18GA | 0.043" | 18 | 12' |
| CC075-54 | 3/4 X 1/2 COLD ROLLED CHANNEL (54MIL) 16GA | 0.054" | 16 | 12' |

PREMIUM ANGLE

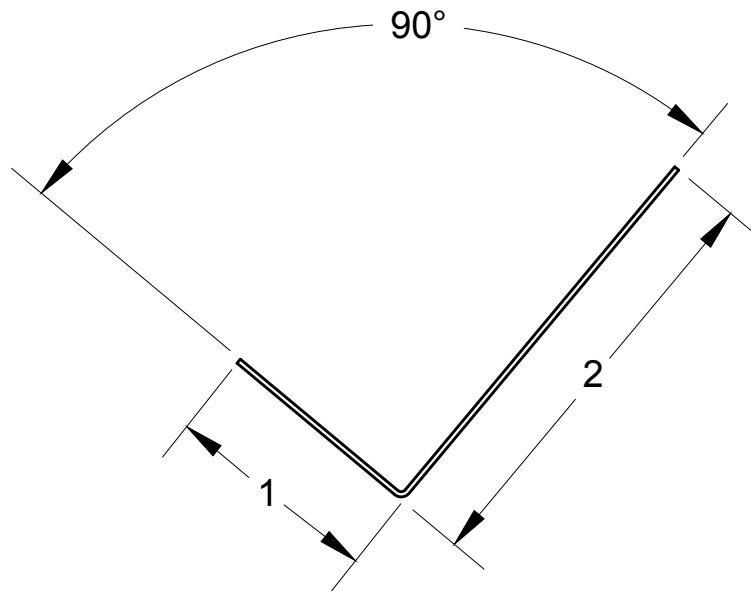

| Part Number | Description | Thickness | Gauge | Length |
|-------------|--------------------------|-----------|-------|--------|
| A100X200-18 | 1 X 2 ANGLE (18MIL) 25GA | 0.018" | 25 | 10' |

RESILIENT CHANNEL

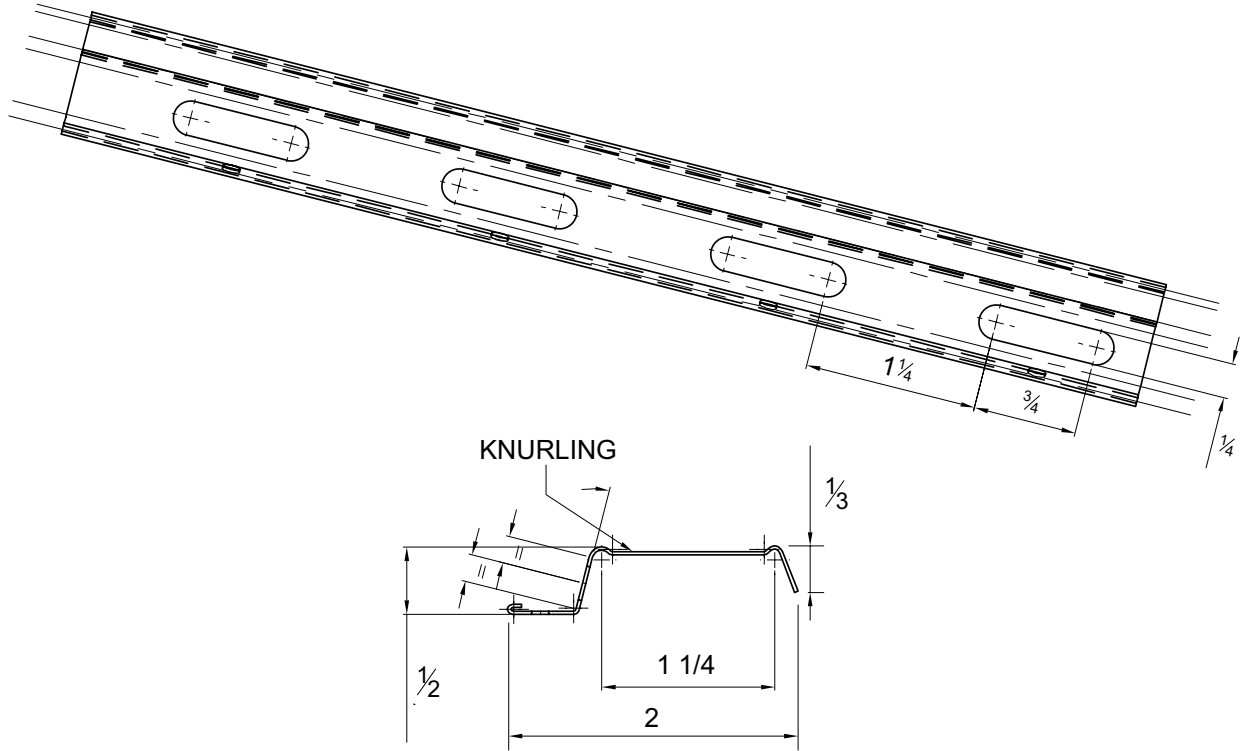

| Part Number | Description | Thickness | Gauge | Length |
|-------------|--|-----------|-------|--------|
| RC125-18 | RESILIENT CHANNEL 1-1/4 FACE (18 MIL) 25GA | 0.018" | 25 | 12' |